



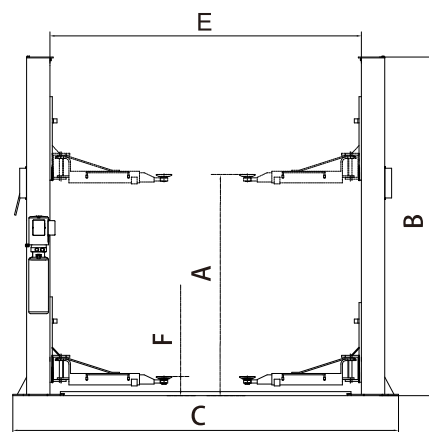

FEATURES


- 4000kg (9,000 lbs) Capacity.
- Dual hydraulic chain-drive cylinders manufactured on high standard.
- 4 three-stage arms are suitable for more vehicles.
- Aero cable used for synchronization.
- Self-lubricating UHMW Polyethylene sliders and bronze bushings.
- Single-point safety release allows technician to easily release both column locks from one column.
- Automatic arm restraints.
- Stackable rubber pad with 1.5", 2.5" and 5" extension.

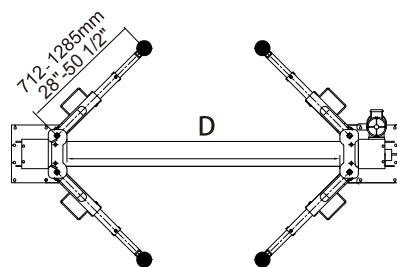

Single Point Lock Release Lever. This Lever Release Locking Mechanisms In Both Columns From One Column



Two Locks, One Release, Only Available By PEAK

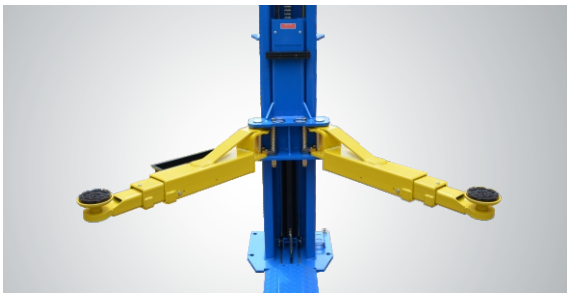

4 three-stages arms are suitable for more vehicles. Extremely high carriages, automatic arms restraints, protect rubber door guards, self-lubricated sliders... make PEAK compact line of two post lifts with many advanced features and high quality.



EXCLUSIVE FEATURE !
The stackable rubber pad assembly with 1.5", 2.5", 5" extension adapters



Automatic arm restraints



The Optional Base Plate Extension Kits No.20903 With extension frame and 14pcs of anchor bolts

SPECIFICATIONS

Model	Style	Lifting Capacity	Lifting Time	A	B	C	D	E	F	Gross Weight	Motor
				Lifting Height	Overall Height	Overall Width	Drive-Thru Clearance	Width Between Columns	Minimum Pad Height		
209X	Floorplate Chain-driven	4.0 T (9,000 lbs.)	49 Seconds	1940-2169mm (76 3/8" - 85 3/8")	2841mm (111 7/8")	3460mm (136 1/4")	2560mm (100 3/4")	2850mm (112 1/4")	90mm (3 1/2")	721kg (1,590lbs)	3.0HP