

MODEL DP10

Clear floor Direct-driven Two-post Lift

<http://www.peaklift.cn>



MODEL DP10

Clear floor Direct-driven Two-post Lift



PEAK Lift

PEAK Lift Model DP10 Meets The Standards As Prescribed By ANSI/ALI ALCTV-2017 Certification

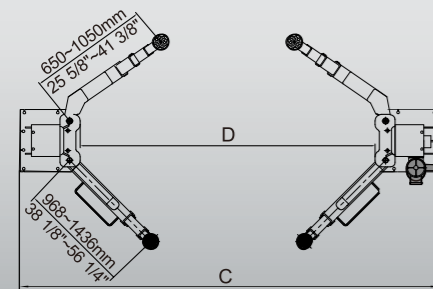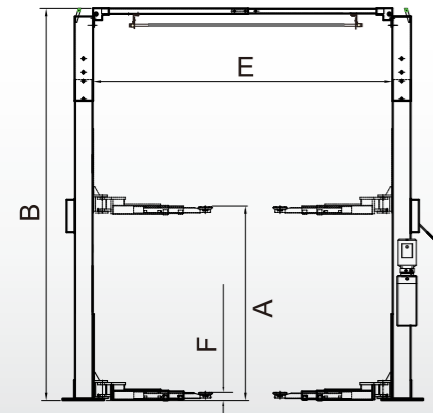

ADVANCE LINE OF TWO POST LIFTS

Model DP10 is our another one of advance line two post lif...Clear floor, more flexible width and high adjustment, advance features.



▲ Single point safety release makes it easier for operators to unlock both columns from one column.




▲ Hydraulic Direct-driven Cylinders.




▲ **SuperAsymmetric** arms allow to load different vehicles in an asymmetric or symmetric configuration.



▲ The stackable rubber pads assembly with 1.5", 2.5", 5" extension adapters.

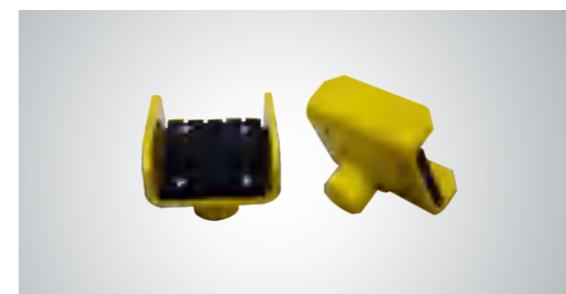


▲ The optional saddle adapter. Kits No.for light truck:20802.

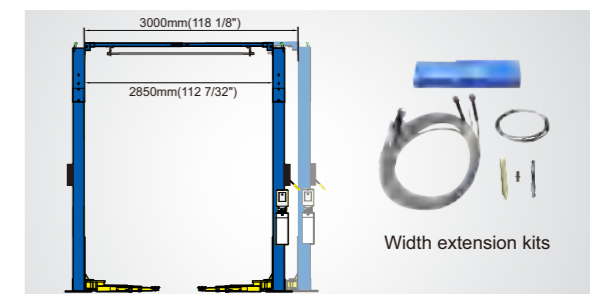

▲ Optional width extension kits, that can extend the width from 2850mm to 3000mm. Kits No.: 20906

FEATURES

- 4500kg (10,000lbs) capacity.
- Dual hydraulic direct-driven cylinders made on high standard.
- **SuperAsymmetric** to load different vehicles in an asymmetric or symmetric configuration.
- Aero cable used for synchronization.
- Single-point manual safety release mechanism, disengages both columns simultaneously from one side.
- Self-lubricating UHMW Polyethylene sliders.
- Clear-floor design, provide unobstructed floor use.
- Overhead safety shut-off device prevents vehicle damage.
- Stackable rubber pads and 1.5",2.5",5"adapters as standard supply.
- Standard two height settings accommodate varying ceiling heights.
- Toe guards and tool trays come as standard.

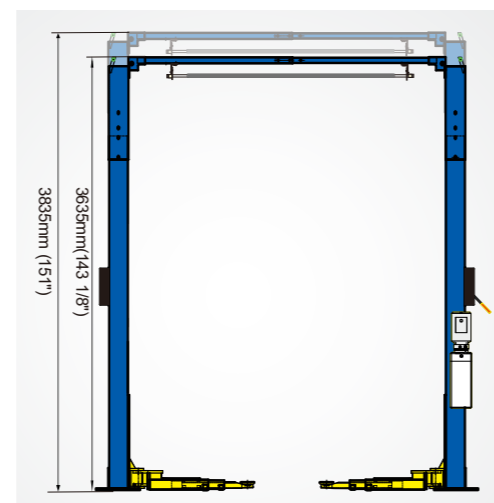

▲ Standard two height settings accommodate varying ceiling heights.

SPECIFICATIONS

Model	Style	Lifting Capacity	Lifting Time	A				B		C	D	E	F	Gross Weight	Motor
				Max. Lifting height: (w/o extension adapter)	Max. Lifting height: (w/ extension adapter)	Max. lock height: (w/o extension adapter)	Max. lock height: (w/ extension adapter)	Overall Height: (low setting)	Overall Height: (high setting)						
DP10	Clearfloor Direct-driven	4.5 T (10,000lbs)	57S	1815mm (72 15/32")	2044mm (80 15/32")	1768mm (69 5/8")	1997mm (78 5/8")	3635mm (143 1/8")	3835mm (151")	3428mm (135")	2528mm (99 1/2")	2850mm (112 1/4")	90mm (3 1/2")	745kg (1,642lbs)	3.0HP