





▲ Electric control device with UP, LOCK and DOWN buttons.



▲ Oil-water separator and solenoid air valve are installed on the power side column.



▲ High quality hydraulic cylinder utilizes imported oil seals.



▲ Double safety locks provide additional safety.



▲ Non-slip diamond platforms come as standard.



▲ Optional extension platform adds an extra 737mm (29") in length to the platform.
Kits No.: 41801-01



▲ Optional Turnplate Each alignment lift need one set (two pcs.) of turnplates.
Kits No.: 40101 Only available on 418A



▲ Optional Rolling Jacks
RJ-10A: pneumatic hydraulic type
4,500Kg.

ELECTRIC CONTROL FOUR POST LIFT MODEL 418 418A

PEAK
World-class lifts

PEAK 418 series is the premium choice for commercial vehicle maintenance. With a robust 8000KG load capacity, these rugged lifts deliver great performance servicing buses, dump trucks, farm equipment and heavy commercial vehicles. Its stepless adjustable platforms offers versatile accommodation handling general service and wheel alignments.




PEAK CORPORATION
<http://www.peaklift.cn>



No.3 Luomu Road, Muyuan, Shishan Town, Nanhai District, Foshan (528225), China
Tel:86-757-81102815 Fax:86-757-81102809



GENERAL SERVICE FOUR POST LIFT


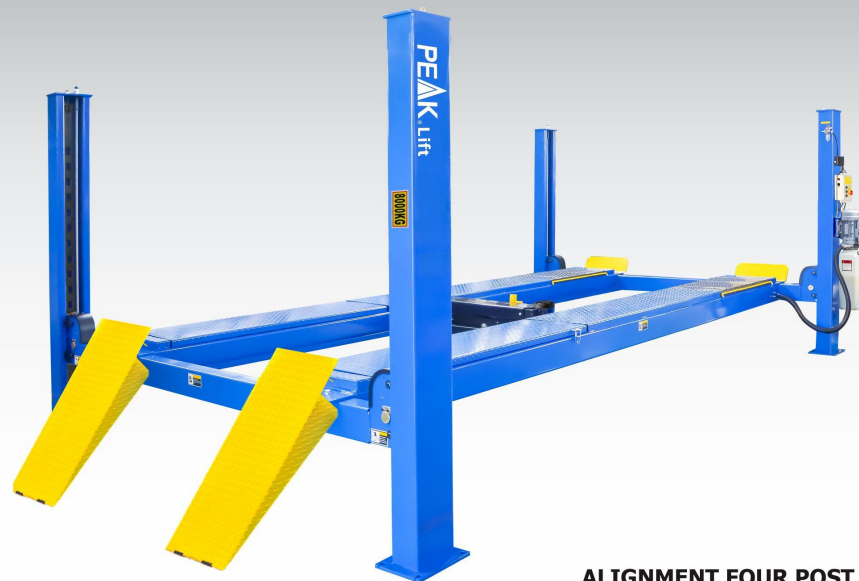


ALIGNMENT FOUR POST LIFT



MODEL 418

FEATURES

- 8000kg (18,000 lbs) capacity;
- Electric-air control operation system.
- Mechanical self-lock and air-driven safety release.
- Electrical hydraulic power system, cable-driven.
- Dual safety devices mechanism: both primary safety locks and cable-slack automatic lock system.
- Non-skid diamond platforms.
- Stepless adjustable width between platforms.
- Optional Rolling Jack: RJ-10A 4500kg (10,000lbs) pneumatic pump.

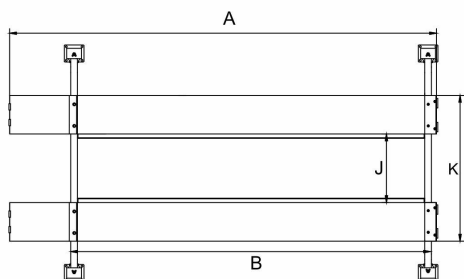

MODEL 418A

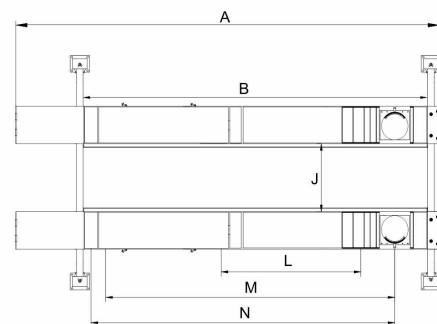

SPECIFICATIONS

				A	B	C	D			E	F	G			H			I			J	K			L	M	N	Gross Weight	Motor Power
Model	Lifting Capacity	Lifting Time	Overall Length (Circ Ramps)	Runway Length	Overall Width	Width Between Rails	Max. Lifting Height	Max. Lock Height to Top of Runway	Overall Height	Minimum Height	Max. Underneath Height	Max. Underneath Height	Max. Lock Underneath Height	Drive-Two Clearance	Width Between Runways		Outside Edge of Runways		Min. Four Wheel Angle	Max. Four Wheel Angle	Max. Two Wheel Angle	Max. Two Wheel Angle							
418	8.0T (18,000lbs)	81S	7474mm (244 1/4")	6200mm (204 1/16")	3482mm (114 1/8")	3108mm (102 1/8")	1900mm (62 1/8")	1830mm (60 1/8")	2180mm (71 7/8")	200mm (7 7/8")	1730mm (56 7/8")	1660mm (54 3/8")	2750mm (90 5/8")		1302mm(51 1/4") Adj. range:85mm(3 3/8")~ Max.1468mm(57 13/16")		2418mm (95 1/4") Adj. range:1201mm(47 1/4")~ Max.2584mm (101 3/4")		/	/	/	/					1661KG (3,662lbs)	3.0HP	
418A	8.0T (18,000lbs)	81S	7461mm (239 3/4")	6000mm (196 8/16")	3482mm (114 1/8")	3108mm (102 1/8")	1950mm (64 1/8")	1880mm (61 3/8")	2180mm (71 7/8")	250mm (9 7/8")	1730mm (56 7/8")	1660mm (54 3/8")	2750mm (90 5/8")		1302mm(51 1/4") Adj. range:85mm(3 3/8")~ Max.1468mm(57 13/16")		2418mm (95 1/4") Adj. range:1201mm(47 1/4")~ Max.2584mm (101 3/4")		2530mm (99 5/8")	4640mm (152 11/16")	5310mm (174 3/8")				2043KG (4,504lbs)	3.0HP			

The images, technical specifications, and descriptions shown here are subject to change without prior notice. Please contact us for the latest information if necessary.