


▲ Proprietary lock control system.



▲ Adjustable trailer platform included as standard. Adj. range: 1077mm~1682mm.



▲ Foldable drive-on ramps. (each lift 2 units).




▲ Optional extended aluminum drive-in ramp. Kits No.: 40815, each lift needs 2 units.



▲ Optional Plastic Oil tray (1set, 4pcs), Kits No.: 40819.



▲ Optional adjustable Jack Tray (adj. range: 920-1181mm). Kits no. 40816.

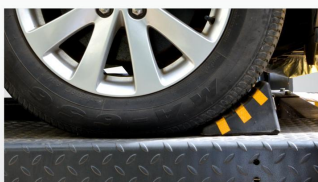

▲ Optional rubber wheel chock P/N: 40811



▲ Optional trailer extended platform adds an extra 609mm (24") length. Kits No.:40818

FOUR POST BOAT STORAGE LIFT

PEAK
World-class lifts

This new series boat storage lifts are engineered to revolutionize the way you store your recreational boats. They come with three versatile designs: Standard, Extended Length & Capacity, and Extended Height that delivering the perfect fit for any boat. With two adjustable width settings, these lifts feature a large drive-in clearance to accommodate various trailers, delivering superior storage experience exceeds expectations.



Patent No.:
2023232158140



PEAK CORPORATION
<http://www.peaklift.cn>



No.3 Luomu Road, Muyuan, Shishan Town, Nanhai District, Foshan (528225) , China
Tel:86-757-81102815 Fax:86-757-81102809

202504





Standard
MODEL 408-HPX
3500KG (8,000lbs)



Extended Length & Capacity
MODEL 409-HPX
4000KG (9,000lbs)




Extended Height
MODEL 408HLX
3500KG (8,000lbs)

FEATURES


- Lifting capacity: 3500KG (8,000lbs) and 4000KG (9,000lbs);
- Proprietary lock control system;
- Manual release, air-free operation;
- Dual safety devices mechanisms: both primary safety locks and cable-slack protection;
- Integrated non-skid diamond platforms;
- Flexible installation, power side could be at any corner;
- Two widths settings come standard to accommodate various boats;
- Foldable drive-in ramps come standard
- High quality hydraulic cylinder design and manufactured at high standard.



Support back-to- back installation to save space.

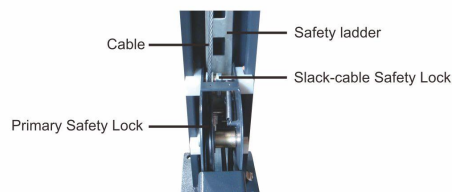

EXCLUSIVE FEATURE
Commercial double safety locks

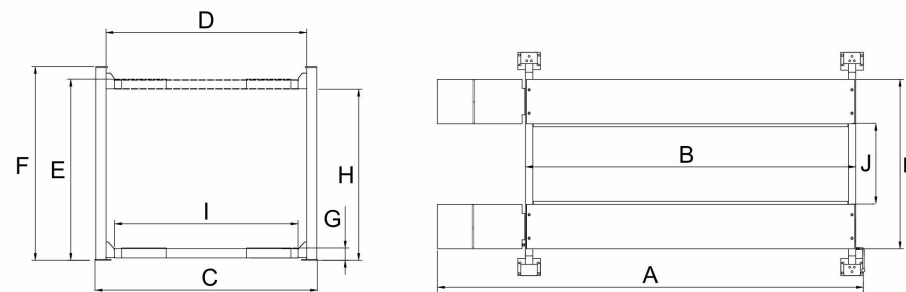

SPECIFICATIONS

Model	Lifting Capacity	Lifting Time	A Overall Length (Inc.Ramps)	B Outside edge of crossbeams	C Overall Width	D Width Between Posts	E Max. lifting height	F Max. locking height	G Overall Height	H Minnum Height	I Max. Underneath Height	J Max. Lock Underneath runway	K Drive-Thru Clearance	L Width Between Runways	M Outside Edge of Runways	N Gross Weight	O Motor Power
408-HPX	3500kg	46S	5642mm (222 1/8")	4615mm (181 11/16")	3350mm (131 7/8")	3104mm (122 3/16")	2227mm (87 11/16")	2157mm (84 15/16")	2455mm (96 5/8")	145mm (5 11/16")	2107mm (82 15/16")	2037mm (80 3/16")	2820mm (111")	1181/1686mm (46 1/2" -66 3/8")	2131/2650mm (83 7/8" -103 3/4")	719kg (1,585lbs)	3.0HP 220V
409-HPX	4000kg	57S	6049mm (238 1/8")	5022mm (197 3/4")	3350mm (131 7/8")	3104mm (122 3/16")	2237mm (88 1/2")	2167mm (85 5/16")	2455mm (96 5/8")	155mm (6 1/8")	2097mm (82 9/16")	2027mm (79 13/16")	2820mm (111")	1181/1650mm (46 1/2" -84 15/16")	2197/2668mm (83 1/2" -104 15/16")	935kg (2,061lbs)	3.0HP 220V
408HLX	3500kg	54S	5642mm (222 1/8")	4615mm (181 11/16")	3350mm (131 7/8")	3104mm (122 3/16")	2659mm (104 11/16")	2589mm (101 15/16")	2870mm (113")	145mm (5 11/16")	2539mm (99 15/16")	2469mm (97 3/16")	2820mm (111")	1181/1686mm (46 1/2" -66 3/8")	2131/2636mm (83 7/8" -103 3/4")	783kg (1,726lbs)	3.0HP 220V

The images, technical specifications, and descriptions shown here are subject to change without prior notice. Please contact us for the latest information if necessary.