


DOUBLE PARKING FOUR POST LIFT MODEL 409-DP 409-DPX



As space masters, our four-post double parking lifts optimize your space efficiency by accommodating four vehicles in a single unit. Ensuring an easy access with a lowest drive-in height in the industry, each lift is equipped with both primary mechanical locks and a cable-slack safety lock. Additionally, the system features a patented concealed lock control mechanism that enhances both operational convenience and safety performance.

Patent No.:
ZL202323215814.0




Double safety locks provide additional safety.



FEATURES

- Double parking designs;
- Lifting capacity: 4000KG, max single car weight:2800kg;
- Support back-to-back installation;
- Patented concealed safety lock control device with single-point manual lock release;
- Dual safety devices mechanisms: both primary safety locks and cable-slack protection;
- Easy access for various vehicles with the lowest drive-in height in the industry.
- Integrated non-skid diamond platforms;
- Double- shaped columns for enhanced strength;
- Foldable drive-on ramps come standard.;
- High quality hydraulic cylinder design and manufactured at high standard.

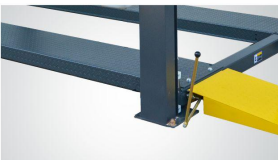

▲ Patented concealed safety lock control device with single-point manual lock release.



▲ Easy access for various vehicles with the lowest drive-in height in the industry.



▲ Optional Motor protect cover for outdoor installation (Kits No.: 40810) with emergency stop switch.




▲ Optional storage wave panels Kits No.40812



▲ Support back-to-back installation.

SPECIFICATIONS

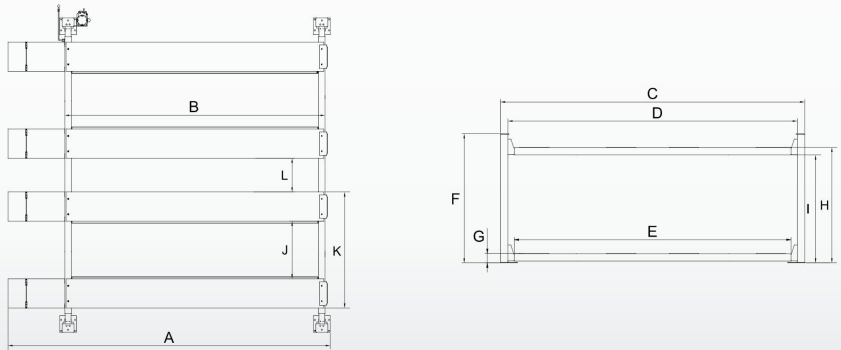

Model	Lifting Capacity	Lifting Time	A Overall Length (Inc.Ramps)	B Overall Length (No Inc.Ramps)	C Overall Width	D Width Between Columns	E Drive Through Width	F Overall Height	G Minimum Height	H Lifting Height	I Max. lock height to top of runway	J Max. height underneath runway	K Max. lock height underneath runway	L Width Between Runways	M Overall width of single parking unit	N Width Between two parking units	Gross Weight	Motor Power
409-DP	4000kg (9,000lbs)	47S	5285mm (208 1/16")	4258mm (167 5/8")	4840mm (190 9/16")	4598mm (181")	4314mm (169 13/16")	2105mm (82 7/8")	150mm (5 15/16")	1870mm (73 5/8")	1800mm (70 7/8")	1750mm (68 7/8")	1680mm (66 1/8")	940mm (37")	1890mm (74 7/16")	350mm (13 3/4")	1257kg (2,771lbs)	2.0HP/3.0HP 220V Single Phase
409-DPX	4000kg (9,000lbs)	57S	6061mm (238 5/8")	5032mm (198 1/8")	4840mm (190 9/16")	4598mm (181")	4314mm (169 13/16")	2455mm (96 5/8")	150mm (5 15/16")	2232mm (87 7/8")	2162mm (85 1/8")	2112mm (83 1/8")	2042mm (80 3/8")	940mm (37")	1890mm (74 7/16")	350mm (13 3/4")	1369kg (3,018lbs)	2.0HP/3.0HP 220V Single Phase

PEAK CORPORATION
<http://www.peaklift.cn>



No.3 Luomu Road, Muyuan, Shishan Town, Nanhai District, Foshan (528225), China
Tel:86-757-81102815 Fax:86-757-81102809