




- ▲ Patented concealed lock control device with manual release.
Patent No.: 2023232158140



- ▲ Stepless adjustable width between platforms.



- ▲ High quality hydraulic cylinder utilizes imported oil seals.

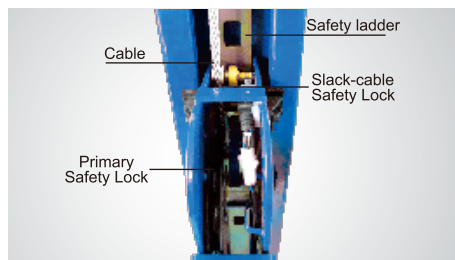


- ▲ Double safety locks provide additional safety.



- ▲ Non-slip diamond platforms come as standard.



- ▲ Optional Platform extension kits add an extra 660mm(26")length to the platform.
Kits No.:KHL01

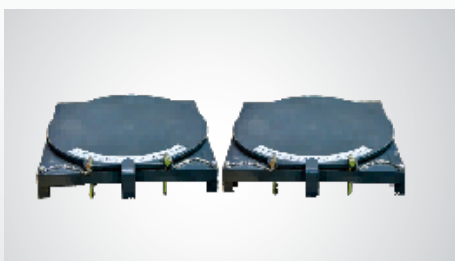

- ▲ Optional Turnplate. Each alignment lift need two units. Kits No.40101
Only available on KHL-4000A
KHL-5500A



- ▲ Optional Rolling Jacks
J6H: manual hydraulic type 2,800Kg.
J6A: pneumatic hydraulic type 2,800Kg

MANUAL RELEASE FOUR POST LIFT

PEAK
World-class lifts

Our KHL four post manual release lifts are designed and built with a strict commitment to world class lifts. They incorporate a patented concealed lock control system and adjustable platforms to deliver professional performance with adaptability to a wide range of vehicles. They also eliminate the need for an external air source.



PEAK CORPORATION
<http://www.peaklift.cn>



No.3 Luomu Road, Muyuan, Shishan Town, Nanhai District, Foshan (528225), China
Tel:86-757-81102815 Fax:86-757-81102809



GENERAL SERVICE FOUR POST LIFT





ALIGNMENT FOUR POST LIFT

MODEL KHL-4000 KHL-5500



FEATURES

- Peak patent design concealed safety lock control device, manual single-point lock release;
- No need extra air source;
- Stelpless adjustable width between platforms;
- Integrated non-skid diamond platforms;
- Standard self-locking mechanical lock and air-drive safety lock;
- Standard primary safety locks and cable-slack protection mechanism;
- Adjustable turnplate pockets to fit various wheel bases (only for KHL-4000A/KHL-5500A) ;
- High quality hydraulic cylinder design and manufactured at high standard.

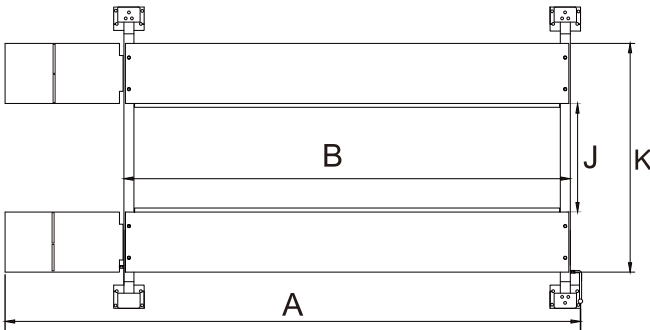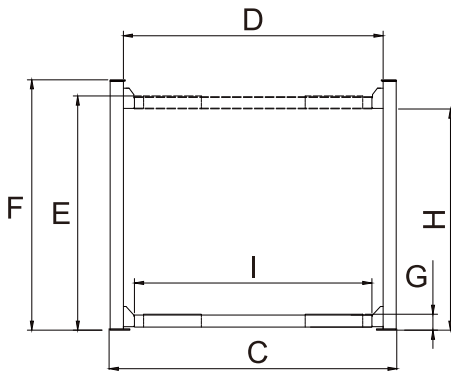

KHL-4000 KHL-5500

MODEL KHL-4000A KHL-5500A

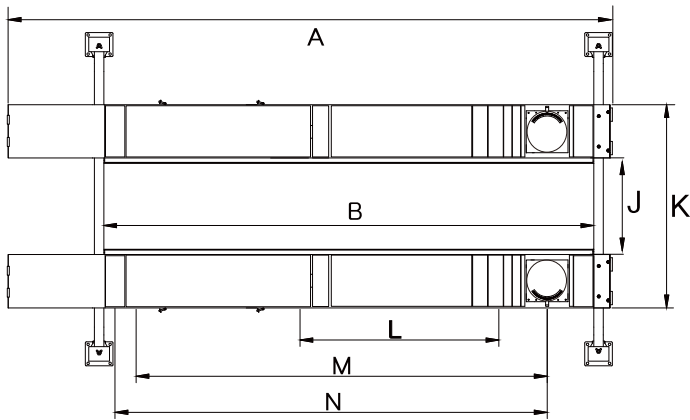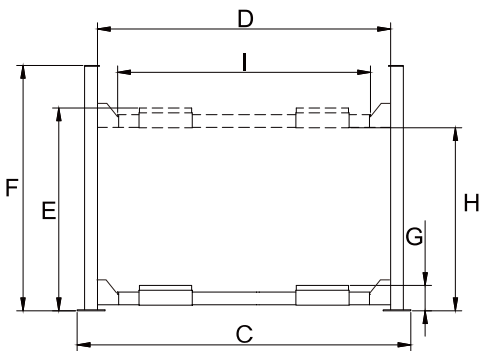

KHL-4000A KHL-5500A

SPECIFICATIONS

Model	Lifting Capacity	Lifting Time	A	B	C	D	E		F	G	H		I	J	K	L	M	N	Gross Weight	Motor Power
			Overall Length (Inc Ramps)	Runway Length	Overall Width	Width Between Posts	Max. Lifting Height	Max. Lock Height to top of runway	Overall Height	Minnum Height	Max. Undereath Height	Max. Lock Undereath runway	Drive-Thru Clearance		Width Between Runways	Outside Edge of Runways	Min. Four Wheel Align	Max. Four Wheel Align		
KHL-4000	4.0 T (9,000lbs)	45S	5516mm (217 3/16")	4442mm (174 7/8")	3212mm (126 7/16")	2852mm (112 1/4")	1892mm (74 1/2")	1822mm (71 3/4")	2105mm (82 7/8")	172mm (6 3/4")	1752mm (69")	1682mm (66 1/4")	2584mm (101 3/4")	1077mm(42 3/8") Min:900mm(35 7/16")~ Max:1322mm(52 1/16")	2093mm (82 3/8") Min:1916mm(75 7/16")~ Max:2338mm (92 1/16")	/	/	/	893KG (1,969lbs)	3.0HP
KHL-4000A	4.0 T (9,000lbs)	45S	5516mm (217 3/16")	4242mm (167")	3212mm (126 7/16")	2852mm (112 1/4")	1942mm (76 7/16")	1872mm (73 11/16")	2105mm (82 7/8")	222mm (8 3/4")	1752mm (69")	1682mm (66 1/4")	2584mm (101 3/4")	1077mm(42 3/8") Min:900mm(35 7/16")~ Max:1322mm(52 1/16")	2093mm (82 3/8") Min:1916mm(75 7/16")~ Max:2338mm (92 1/16")	2004mm (78 7/8")	3652mm (143 3/4")	3686mm (145 1/8")	1115KG (2,458lbs)	3.0HP
KHL-5500	5.5 T (12,000lbs)	60S	6096mm (240")	5022mm (197 3/4")	3212mm (126 7/16")	2852mm (112 1/4")	1892mm (74 1/2")	1822mm (71 3/4")	2105mm (82 7/8")	172mm (6 3/4")	1752mm (69")	1682mm (66 1/4")	2584mm (101 3/4")	1077mm(42 3/8") Min:965mm(38")~ Max:1322mm(52 1/16")	2093mm (82 3/8") Min:1981mm(78")~ Max:2338mm (92 1/16")	/	/	/	1020KG (2,249lbs)	3.0HP
KHL-5500A	5.5 T (12,000lbs)	60S	6096mm (240")	4822mm (189 3/16")	3212mm (126 7/16")	2852mm (112 1/4")	1942mm (76 7/16")	1872mm (73 11/16")	2105mm (82 7/8")	222mm (8 3/4")	1752mm (69")	1682mm (66 1/4")	2584mm (101 3/4")	1077mm(42 3/8") Min:965mm(38")~ Max:1322mm(52 1/16")	2093mm (82 3/8") Min:1981mm(78")~ Max:2338mm (92 1/16")	2076mm (81 3/4")	4224mm (166 5/16")	4258mm (167 5/8")	1276KG (2,813lbs)	3.0HP

The images, technical specifications, and descriptions shown here are subject to change without prior notice. Please contact us for the latest information if necessary.