





▲ Electric control device with UP, LOCK and DOWN buttons.



▲ Oil-water separator and solenoid air valve are installed on the power side column.



▲ High quality hydraulic cylinder utilizes imported oil seals.



▲ Double safety locks provide additional safety.



▲ Non-slip diamond platforms come as standard.



▲ Optional extension platform adds an extra 660mm (26") in length to the platform. Kits No.: 41403



▲ Optional Turnplate Each alignment lift need one set (two pcs.) of turnplates. Kits No.: 40101
Only available on 414A\414AE



▲ Optional Rolling Jacks RJ-8A: pneumatic hydraulic type 3,500Kg


ELECTRIC CONTROL FOUR POST LIFT 414 414E MODEL 414A 414AE



PEAK
World-class lifts

The 414 Heavy Duty Series, with a robust load capacity of 6,500 KG, is tailored to meet the professional needs with uncompromising strength and reliability. They are the preferred options for technicians working on trucks, SUVs, and other heavy-duty vehicles, whether for routine maintenance or complex alignment tasks, providing a solid foundation for maximum efficiency and performance.



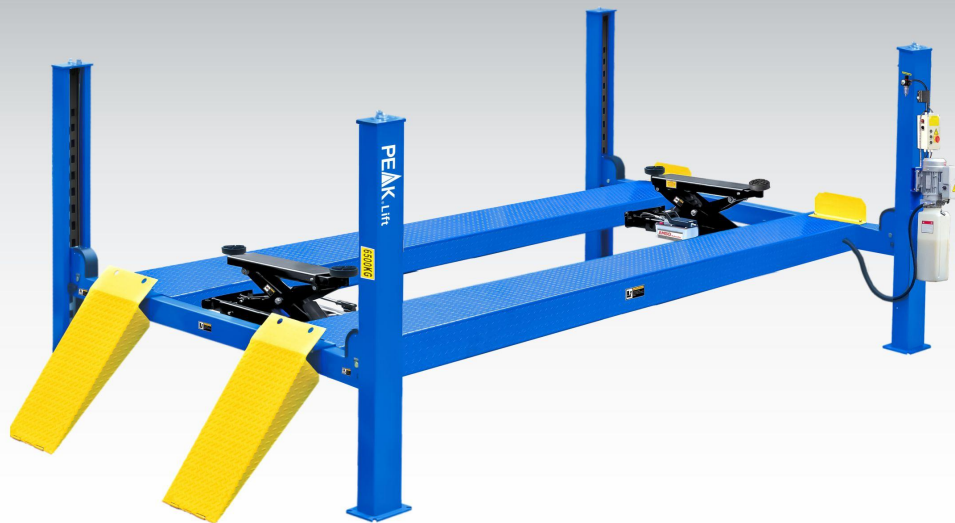

GENERAL SERVICE FOUR POST LIFT





ALIGNMENT FOUR POST LIFT

MODEL 414 414E



FEATURES

- 24V electrical control operation system.
- High quality hydraulic cylinder design and manufactured at high standard.
- Mechanical self-locking and air-release safety lock system.
- Dual safety devices mechanism: both primary safety locks and cable-slack protection system.
- Non-skid diamond platforms.
- Stepless adjustable width between platforms.

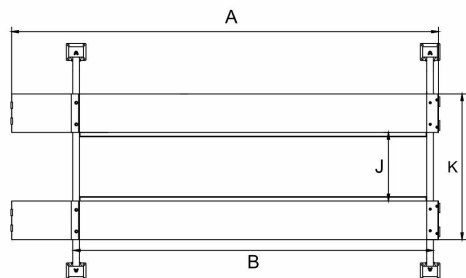

414 414E

MODEL 414A 414AE

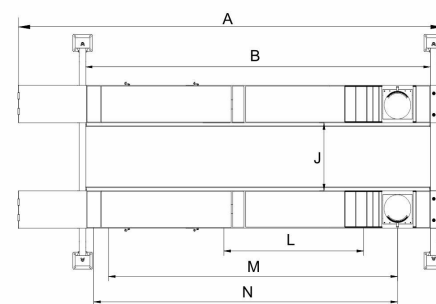

414A 414AE

SPECIFICATIONS

Model	Lifting Capacity	Lifting Time	A		B		C		D		E		F		G		H		I		J		K		L		M		N		Gross Weight	Motor Power
			Overall Length (inch/Tram)	Runway Length	Overall Width	Width Between Posts	Max. Lifting Height	Max. Lck Height to top of Runway	Overall Height	Minimum Height	Max. Underneath Height	Max. Lck Underneath Height	Drive-Turn Clearance	Width Between Runways	Outside Edge of Runways	Min. Four Wheel Angle	Max. Four Wheel Angle	Max. Two Wheel Angle														
414	6.5T (14,000lbs)	79S	6554mm (258")	5292mm (208 3/8")	3324mm (130 7/8")	2946mm (116")	1920mm (75 9/16")	1840mm (72 7/16")	2189mm (86 3/16")	200mm (7 7/8")	1750mm (68 7/8")	1670mm (65 3/4")	2592mm (102 1/16")	1168mm (46")	2184mm (86")	/	/	/	/	1356KG (2,989lbs)	3.0HP											
414A	6.5T (14,000lbs)	79S	6528mm (257")	5092mm (200 1/2")	3324mm (130 7/8")	2946mm (116")	1970mm (77 9/16")	1800mm (70 7/16")	2189mm (86 3/16")	250mm (9 13/16")	1750mm (68 7/8")	1670mm (65 3/4")	2592mm (102 1/16")	1168mm (46")	2184mm (86")	2353mm (92 5/8")	4501mm (177 3/16")	4535mm (178 9/16")	1559KG (3,430lbs)	3.0HP												
414E	6.5T (14,000lbs)	81S	7278mm (286 9/16")	6016mm (236 7/8")	3324mm (130 7/8")	2946mm (116")	1920mm (75 9/16")	1840mm (72 7/16")	2189mm (86 3/16")	200mm (7 7/8")	1750mm (68 7/8")	1670mm (65 3/4")	2592mm (102 1/16")	1168mm (46")	2184mm (86")	/	/	/	1427KG (3,146lbs)	3.0HP												
414AE	6.5T (14,000lbs)	81S	7252mm (285 1/2")	5816mm (229")	3324mm (130 7/8")	2946mm (116")	1970mm (77 9/16")	1800mm (70 7/16")	2189mm (86 3/16")	250mm (9 13/16")	1750mm (68 7/8")	1670mm (65 3/4")	2592mm (102 1/16")	1168mm (46")	2184mm (86")	2353mm (92 5/8")	4501mm (177 3/16")	5269mm (207 1/16")	1654KG (3,644lbs)	3.0HP												

*** The images, technical specifications, and descriptions shown here are subject to change without prior notice. Please contact us for the latest information if necessary.***