





▲ Electric control device with UP, LOCK and DOWN buttons.



▲ Oil-water separator and solenoid air valve are installed on the power side column.




▲ High quality hydraulic cylinder utilizes imported oil seals.




▲ Double safety locks provide additional safety.



▲ Non-slip diamond platforms come as standard.



▲ Stepless adjustable width between platforms.



▲ Optional Turnplate. Each alignment lift need two units. Kits No.40101 Only available on 409A\412A\412AX



▲ Optional Rolling Jacks
J6H: manual hydraulic type 2,800KG.
J6A: pneumatic hydraulic type 2,800KG.

ELECTRIC CONTROL FOUR POST LIFT 409 409A MODEL 412 412A 412AX



PEAK
World-class lifts

PEAK's range of four-post electric control lifts, with capacities ranging from 4,000 to 5,500KG, is designed in accordance with rigorous commercial standards and is certified by CE. The robust construction incorporates several advanced features, including a dual safety lock system and stepless adjustable platforms. These deliver ultimate operational safety, stability and adaptability for optimal performance in servicing various vehicles, from compact cars to full-size pick-ups.



PEAK CORPORATION
<http://www.peaklift.cn>



No.3 Luomu Road, Muyuan, Shishan Town, Nanhai District, Foshan (528225), China
Tel:86-757-81102815 Fax:86-757-81102809





GENERAL SERVICE FOUR POST LIFT

MODEL 409 412

FEATURES

- 24V electrical control operation system.
- High quality hydraulic cylinder design and manufactured at high standard.
- Mechanical self-locking and air-release safety lock system.
- Dual safety devices mechanism: both primary safety locks and cable-slack protection system.
- Non-skid diamond platforms.
- Stepless adjustable width between platforms.

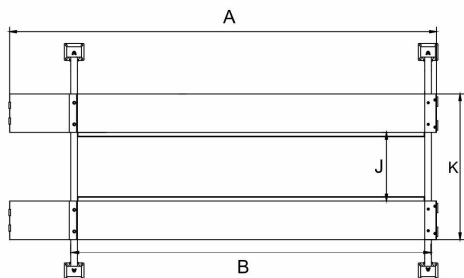


409 412



ALIGNMENT FOUR POST LIFT

MODEL 409A 412A 412AX

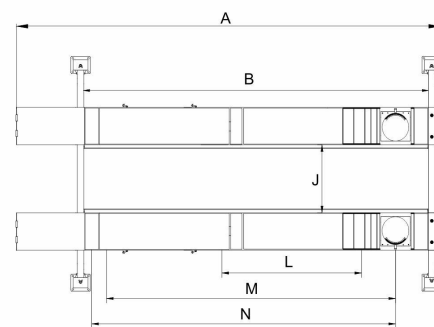

409A 412A 412AX

SPECIFICATIONS

			A	B	C	D	E	F	G	H	I	J	K	L	M	N	Gross Weight	Motor Power			
Model	Lifting Capacity	Lifting Time	Overall Length (Inch (Ramps))	Runway Length	Overall Width	Width Between Posts	Max. Lifting Height	Max. Lock Height E of top of runway	Overall Height	Minimum Height	Max. Underneath Height	Max. Lock Underneath Height	Drive-Thru Clearance	Width Between Runways	Outside Edge of Runways	Min. Floor Height	Max. Floor Wheel Align	Max. Floor Wheel Align	Max. Floor Wheel Align		
409	4.0 T (8,000lbs)	45S	5512mm (217")	4442mm (174 7/8")	3208mm (126 1/4")	2852mm (112 1/4")	1870mm (73 5/8")	1800mm (70 7/8")	2185mm (86")	170mm (6 5/8")	1730mm (68 1/8")	1660mm (65 3/8")	2498mm (98 3/8")	Adj. range:110mm(43 3/8") Max.1300mm(51 1/8")	2116mm (83 1/4")	/	/	/	/	921KG (2,030lbs)	3.0HP
409A	4.0 T (8,000lbs)	45S	5512mm (217")	4242mm (167")	3208mm (126 1/4")	2852mm (112 1/4")	1920mm (75 5/8")	1850mm (72 7/8")	2185mm (86")	220mm (8 5/8")	1730mm (68 1/8")	1660mm (65 3/8")	2498mm (98 3/8")	Adj. range:110mm(43 3/8") Max.1300mm(51 1/8")	2116mm (83 1/4")	2000mm (78 3/4")	3460mm (136 3/4")	3600mm (141 3/4")	3600mm (141 3/4")	1149KG (2,533lbs)	3.0HP
412	5.5 T (12,000lbs)	63S	6062mm (239 13/16")	5022mm (197 3/4")	3208mm (126 1/4")	2852mm (112 1/4")	1870mm (73 5/8")	1800mm (70 7/8")	2185mm (86")	170mm (6 5/8")	1730mm (68 1/8")	1660mm (65 3/8")	2498mm (98 3/8")	Adj. range:1000mm(43 3/8") Max.1300mm(51 1/8")	2116mm (83 1/4")	/	/	/	/	1276KG (2,813lbs)	3.0HP
412A	5.5 T (12,000lbs)	63S	6062mm (239 13/16")	4822mm (189 13/16")	3208mm (126 1/4")	2852mm (112 1/4")	1920mm (75 5/8")	1850mm (72 7/8")	2185mm (86")	220mm (8 5/8")	1730mm (68 1/8")	1660mm (65 3/8")	2498mm (98 3/8")	Adj. range:1000mm(43 3/8") Max.1300mm(51 1/8")	2116mm (83 1/4")	2087mm (81 7/8")	4680mm (184 1/4")	4230mm (166 9/16")	4230mm (166 9/16")	1334KG (2,941lbs)	3.0HP
412AX	5.5 T (12,000lbs)	63S	6062mm (239 13/16")	4822mm (189 13/16")	3356mm (132 1/8")	3000mm (118 1/8")	1920mm (75 5/8")	1850mm (72 7/8")	2185mm (86")	220mm (8 5/8")	1730mm (68 1/8")	1660mm (65 3/8")	2546mm (104 1/4")	Adj. range:1000mm(43 3/8") Max.1375mm(54 1/8")	2116mm (83 1/4")	2087mm (81 7/8")	4680mm (184 1/4")	4230mm (166 9/16")	4230mm (166 9/16")	1390KG (3,060lbs)	3.0HP

The images, technical specifications, and descriptions shown here are subject to change without prior notice. Please contact us for the latest information if necessary.